

Descriptions

- Switching application
- Interface circuit and driver circuit application

Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process
- High packing density

Ordering Information

Type NO.	Marking	Package Code
SRA2207S	RA7	SOT-23

Outline Dimensions

unit : mm

The image shows the mechanical dimensions and electrical equivalent circuit for the SRA2207S transistor. The mechanical drawing includes a top view and a side view. The top view shows a rectangular package with dimensions: overall width 2.20~2.60 mm, central width 1.20~1.40 mm, and overall height 2.80~3.00 mm. Pin 1 is on the left, pin 2 is on the right, and pin 3 is at the bottom. The distance from the top edge to the center of pin 1 is 1.90 Typ., and the distance from the bottom edge to the center of pin 2 is 0.43 Max. The side view shows a height of 0.90~1.02 mm, a base width of 0.10 Max., and a lead width of 0.19 Max. with a 0.20 Min. gap between leads.

The equivalent circuit diagram shows a PNP transistor with an input terminal IN connected to the base through resistor R₁. The emitter is connected to a COMMON terminal through resistor R₂. The collector is connected to an output terminal OUT.

R ₁	R ₂
10KΩ	47KΩ

PIN Connections
 1. IN
 2. COMMON
 3. OUT

Absolute Maximum Ratings

(Ta=25°C)

Characteristic	Symbol	Rating	Unit
Output voltage	V_O	-50	V
Input voltage	V_I	-30, 6	V
Output current	I_O	-100	mA
Power dissipation	P_D	200	mW
Junction temperature	T_J	150	°C
Storage temperature range	T_{stg}	-55 ~ 150	°C

Electrical Characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output cut-off current	$I_{O(OFF)}$	$V_O=-50V, V_I=0$	-	-	-500	nA
DC current gain	G_I	$V_O=-5V, I_O=-10mA$	80	150	-	-
Output voltage	$V_{O(ON)}$	$I_O=-10mA, I_I=-0.5mA$	-	-0.1	-0.3	V
Input voltage (ON)	$V_{I(ON)}$	$V_O=-0.2V, I_O=-5mA$	-	-	-1.8	V
Input voltage (OFF)	$V_{I(OFF)}$	$V_O=-5V, I_O=-0.1mA$	-0.5	-	-	V
Transition frequency	f_T^*	$V_O=-10V, I_O=-5mA, f=1MHz$	-	200	-	MHz
Input current	I_I	$V_I=-5V, I_O=0$	-	-	-0.88	mA
Input resistor (Input to base)	R_1	-	7	10	13	K Ω
Input resistor (Base to common)	R_2	-	33	47	61	K Ω

* : Characteristic of transistor only

Electrical Characteristic Curves

Fig. 1 $I_o - V_{I(ON)}$

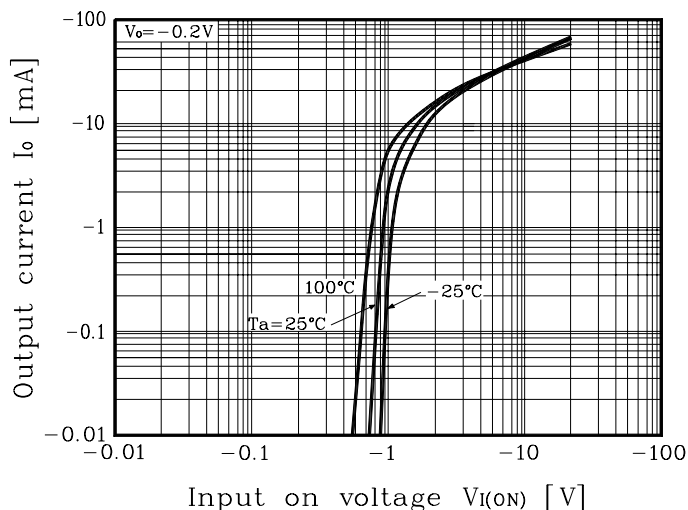


Fig. 2 $I_o - V_{I(OFF)}$


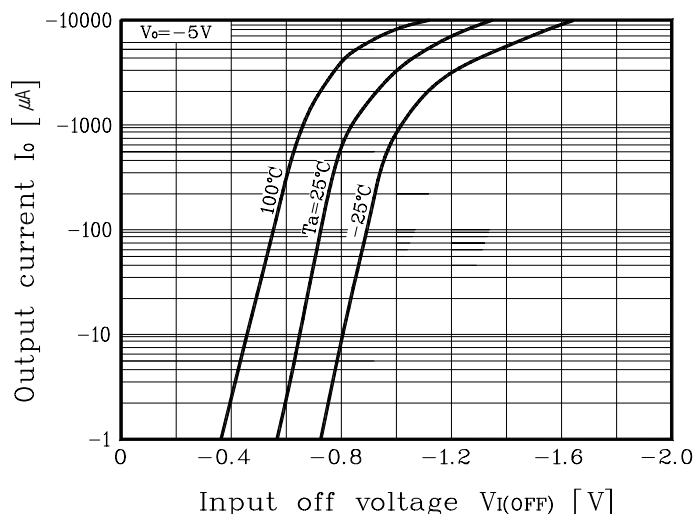


Fig. 3 $G_I - I_o$

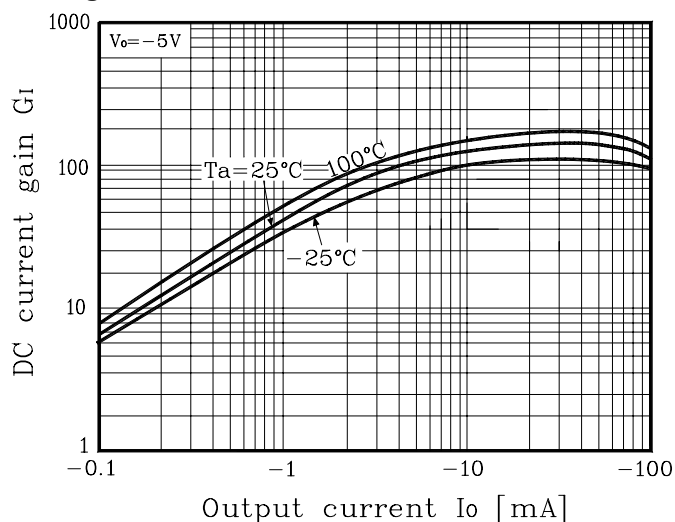

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.