

Description

The S393 consists of two independent voltage comparators designed to operate from a single power supply over a wide voltage range.

Features

- Single Supply Operation: 2V to 36V.
- Dual Supply Operation: $\pm 1V$ to $\pm 18V$.
- Allow Comparison of Voltages Near Ground Potential.
- Low Current Drain 800uA Typ.
- Compatible with all Forms of Logic.
- Low Input Bias Current: 25nA Typ.
- Low Input Offset Current: $\pm 5nA$ Typ.
- Low Offset Voltage: $\pm 1mV$ Typ.

Applications


- Transducer amplifier
- DC gain blocks
- Conventional operational amplifiers

Ordering Information

Type NO.	Marking	Package Code
S393P	S393P	DIP-8

Outline Dimensions

unit : mm

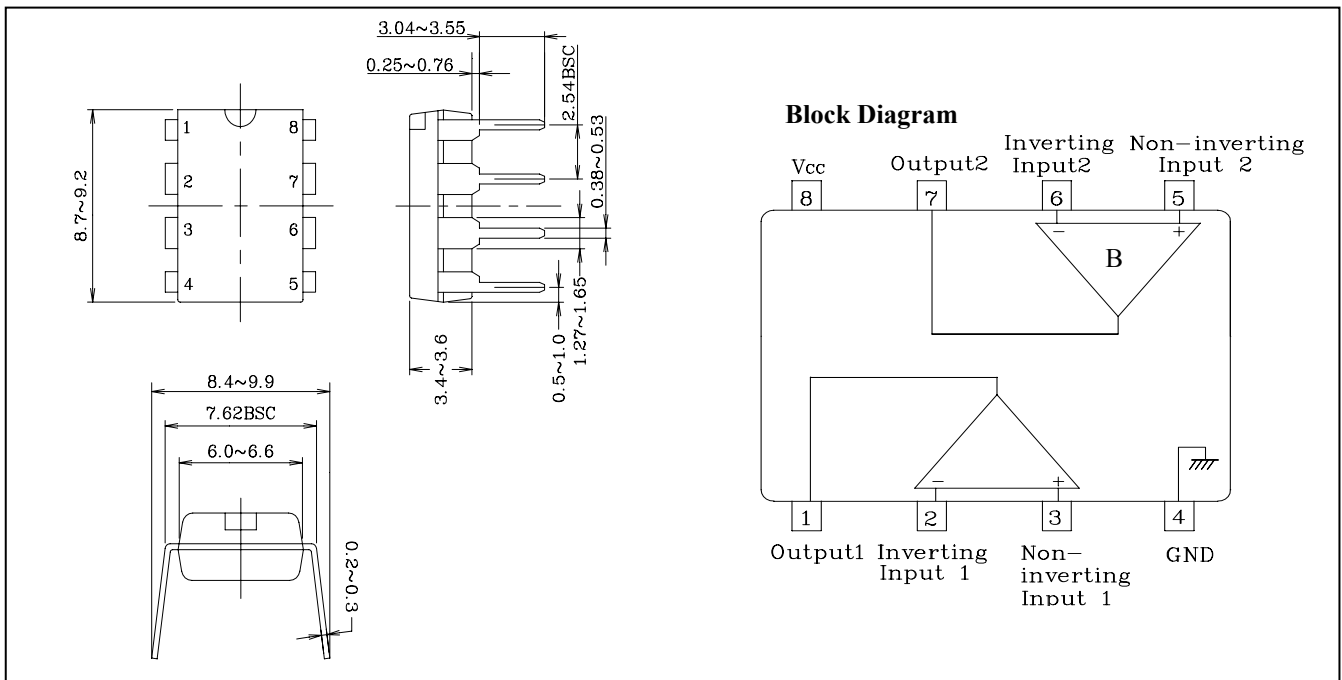

Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Supply voltage	V_{CC}	36 or ± 18	V
Differential input voltage	V_{IND}	36	V
Input voltage	V_{IN}	-0.3 ~ +36	V
Power Dissipation	P_D	570	mW
Operating temperature	T_{opr}	-40 ~ +85	°C
Storage temperature	T_{stg}	-55 ~ 150	°C

Electrical Characteristics

(Unless otherwise specified. $V_{CC} = 5V$ and $-40\text{ °C} \leq T_a \leq +85\text{ °C}$)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Offset Voltage	V_{IOS}	$V_O = 1.4V$ $R_S = 0\Omega$	-	± 1	± 5	mV
Input Offset Current	I_{IOS}	-	-	± 5	± 50	nA
Input Bias Current	I_{IB}	-	-	25	250	nA
Input Common Mode Voltage Range	V_{ICR}	-	0	-	V_{CC} -1.5	V
Supply Current	I_{CC}	$V_{CC} = 30V, R_L = \infty, \text{ All Channel}$	-	-	2.5	mA
Large Signal Voltage Gain	A_V	$V_{CC} = 15V$ $R_L = 15\text{ K}\Omega$	50	200	-	V/mV
Output Voltage ('L' Level)	V_{SAT}	$V_{IN+} = 0V, V_{IN-} = 1V$ $I_{SINK} \leq 4mA$	-	150	400	mV
Response Time	t_{RES}	$R_L = 5.1\text{ K}\Omega, C_L = 15\text{ pF}$	-	1.3	-	μs
Output Sink Current	I_{SINK}	$V_O \leq 1.5V$ $V_{IN+} = 0V, V_{IN-} = 1V$	6	16	-	mA
Output Leakage Current	I_{Leak}	$V_O = 5V$ $V_{IN+} = 1V, V_{IN-} = 0V$	-	0.1	-	nA

Electrical Characteristic Curves

Fig. 1 $V_{CC}-I_{CC}$

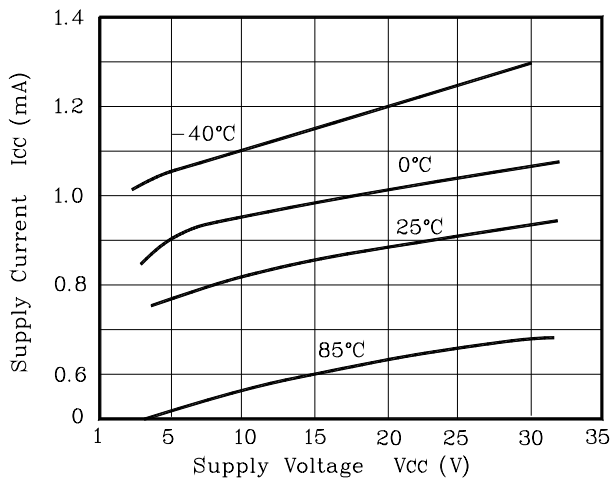


Fig. 2 $V_{CC}-I_{IB}$

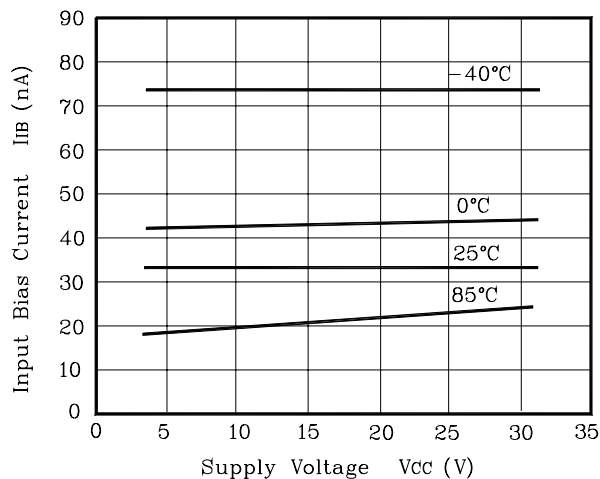


Fig. 3 $V_{OL}-I_{SINK}$

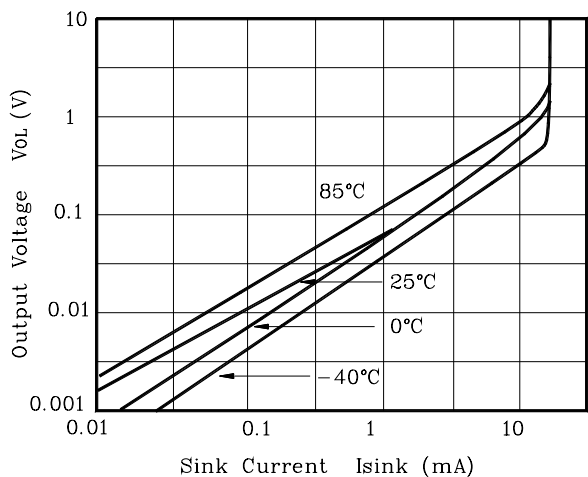


Fig. 4 P_D-T_a

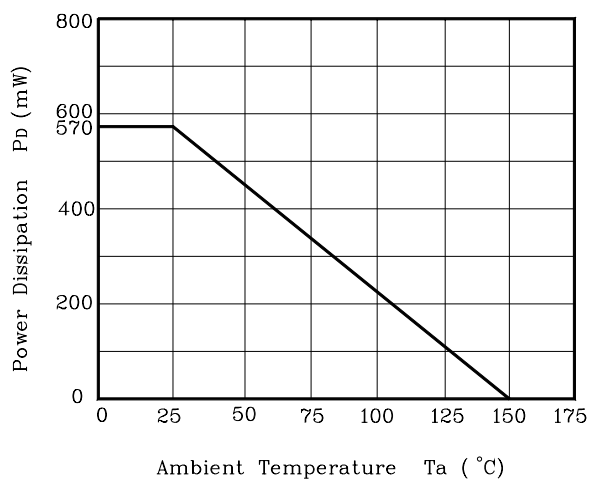


Fig. 5 $V_{IN}, V_{OUT}-t_{rsp}$


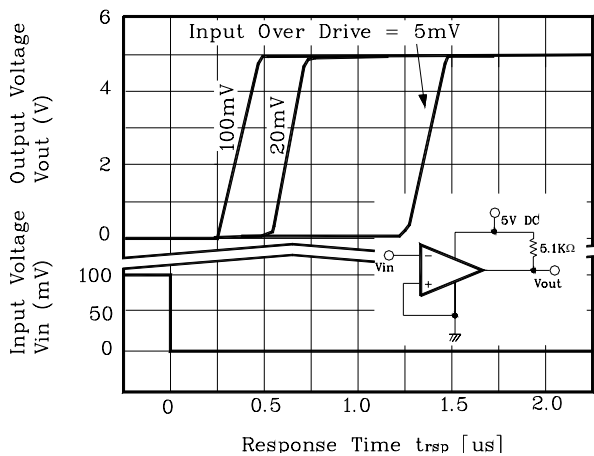


Fig. 6 $V_{IN}, V_{OUT}-t_{rsp}$

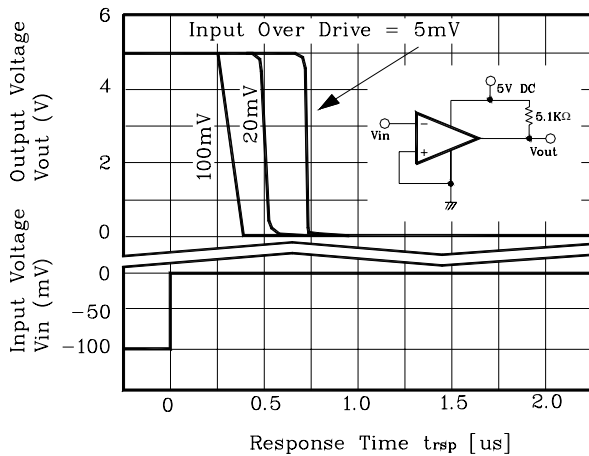

These AUK products are intended for usage in general electronic equipments(Office and communication equipment, measuring equipment, domestic electrification, etc.).

Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.).

AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation with AUK.