

Features


- High speed switching
- $V_{CEO(sus)}=400V$
- Suitable for Switching Regulator and Motor Control

Ordering Information

Type NO.	Marking	Package Code
STD13003	STD13003	MPT

Outline Dimensions

unit : mm

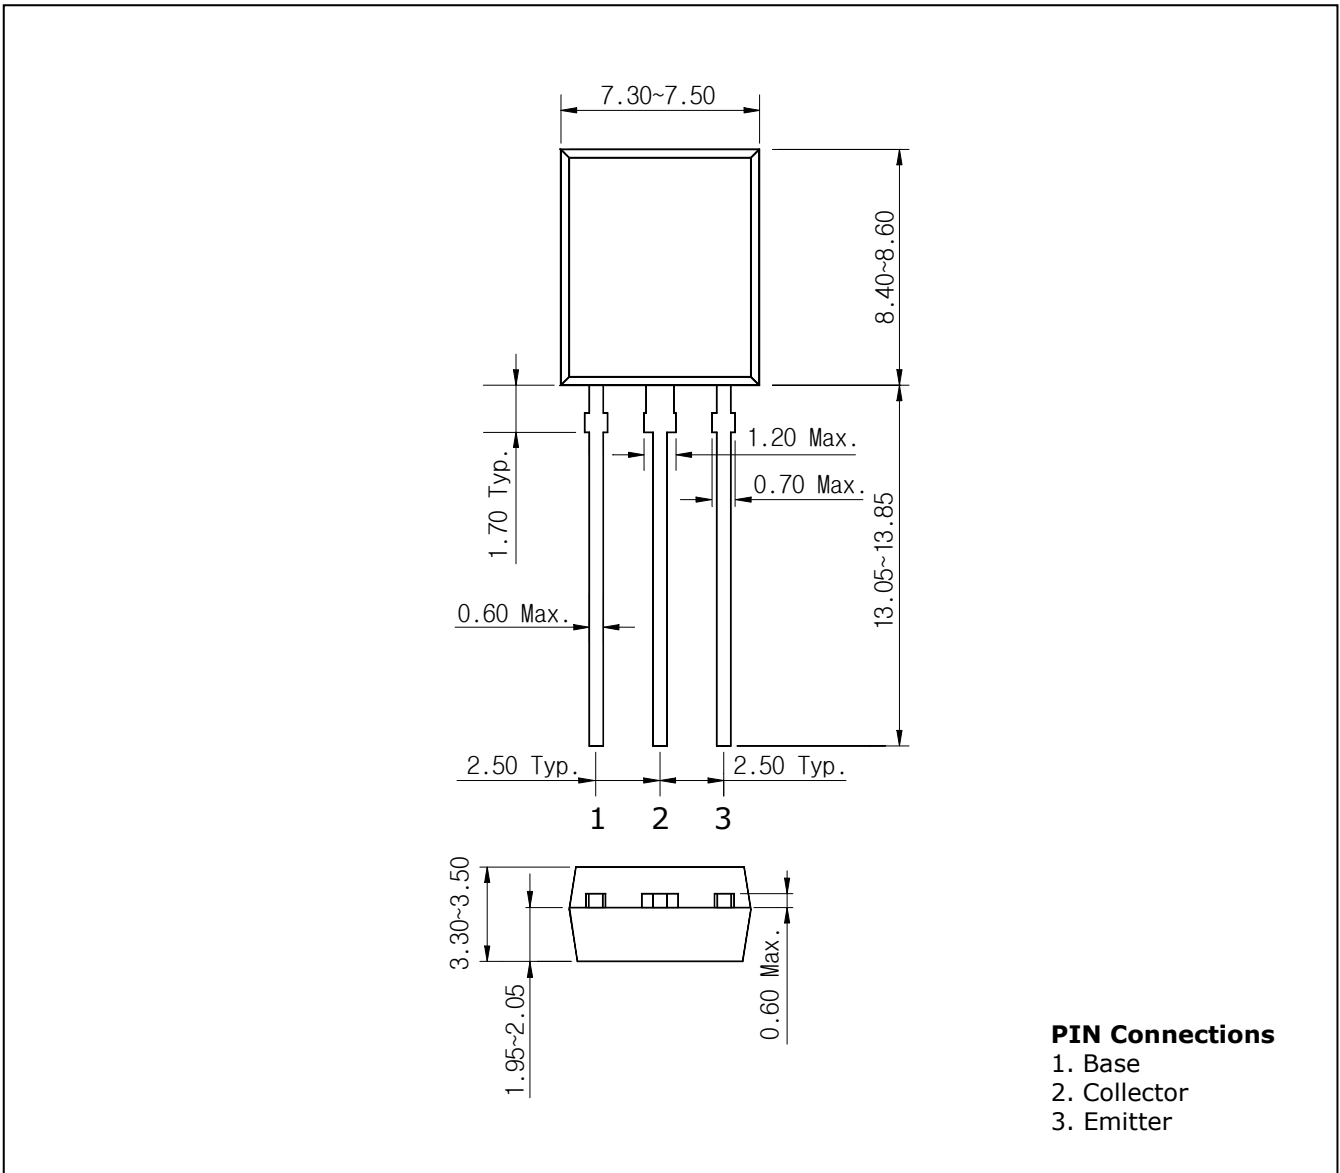

Absolute Maximum Ratings

(T_c=25°C)

Characteristic	Symbol	Rating	Unit
Collector-base voltage	V _{CB0}	700	V
Collector-emitter voltage	V _{CEO}	400	V
Emitter-base voltage	V _{EBO}	9	V
Collector current (DC)	I _C	1.5	A
Collector current (Pulse)	I _{CM}	3	A
Base current (DC)	I _B	0.75	A
Total Power dissipation	P _C	1.2	W
Junction temperature	T _J	150	°C
Storage temperature range	T _{stg}	-55~150	°C

Electrical Characteristics

(T_c=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-emitter sustaining voltage	V _{CE(sus)}	I _C =5mA, I _B =0	400	-	-	V
Collector cut-off current	I _{CB0}	V _{CB} =700V, I _E =0			10	μA
Emitter cut-off current	I _{EBO}	V _{EB} =9V, I _C =0	-	-	10	μA
DC Current gain	h _{FE} *	I _C =0.5A, V _{CE} =2V	8	-	40	
		I _C =1A, V _{CE} =2V	5	-	-	
Collector-emitter saturation voltage	V _{CE(sat)} *	I _C =0.5A, I _B =0.1A	-	-	0.5	V
		I _C =1A, I _B =0.25A	-	-	1	
		I _C =1.5A, I _B =0.5A	-	-	3	
Base-emitter saturation voltage	V _{BE(sat)} *	I _C =0.5A, I _B =0.1A	-	-	1	V
		I _C =1A, I _B =0.25A	-	-	1.2	
Transition frequency	f _T	V _{CB} =10V, I _C =0.1A, f=1MHz	4	-	-	MHz
Output capacitance	C _{ob}	V _{CB} =10V, I _E =0, f=0.1MHz	-	21	-	pF
Turn on Time	t _{on}	V _{CC} =125V, I _C =1A I _{B1} =-I _{B2} =0.2A	-	-	1.1	μs
Storage Time	t _{stg}		-	-	4	
Fall Time	t _f		-	-	0.7	

* Pulse test: t_p ≤ 300 μs, Duty cycle ≤ 2%

Electrical Characteristic Curves

Fig. 1 $I_C - V_{CE}$

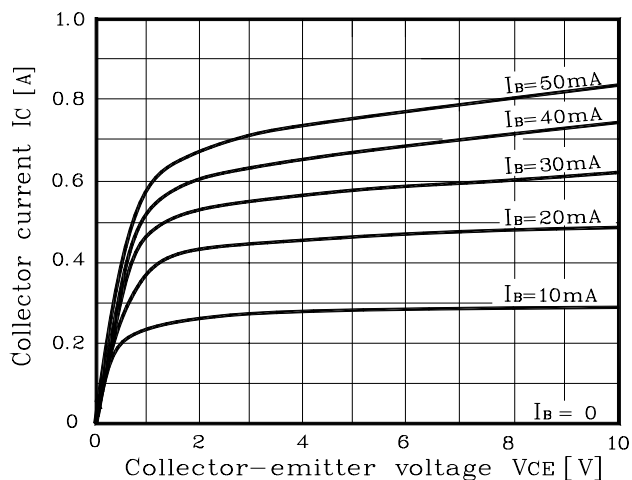


Fig. 2 $V_{BE(sat)}, V_{CE(sat)} - I_C$

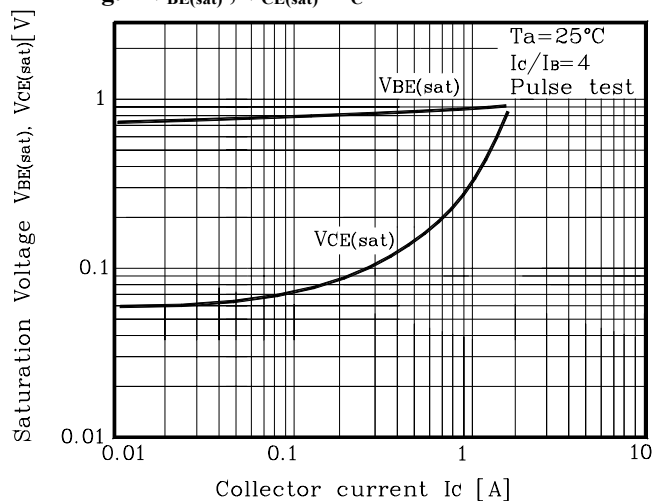


Fig. 3 $h_{FE} - I_C$

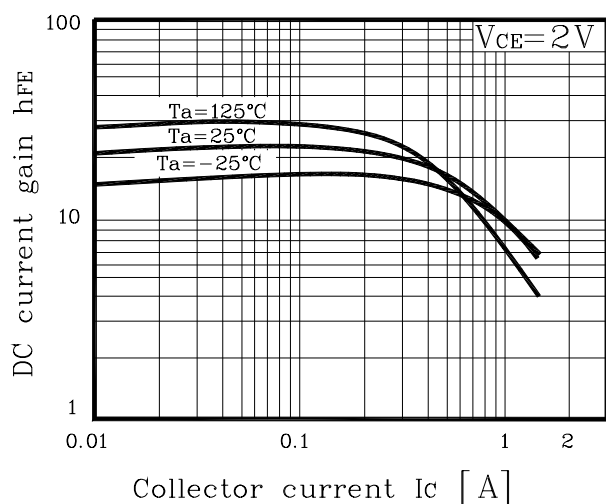


Fig. 4 Turn off time - I_C

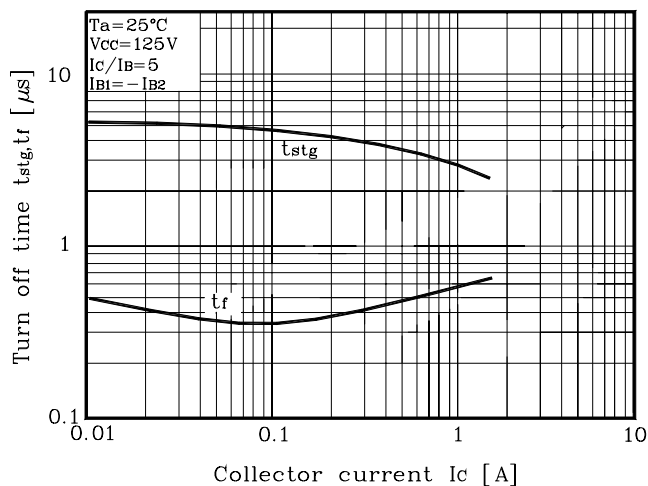


Fig. 5 Turn on time - I_C


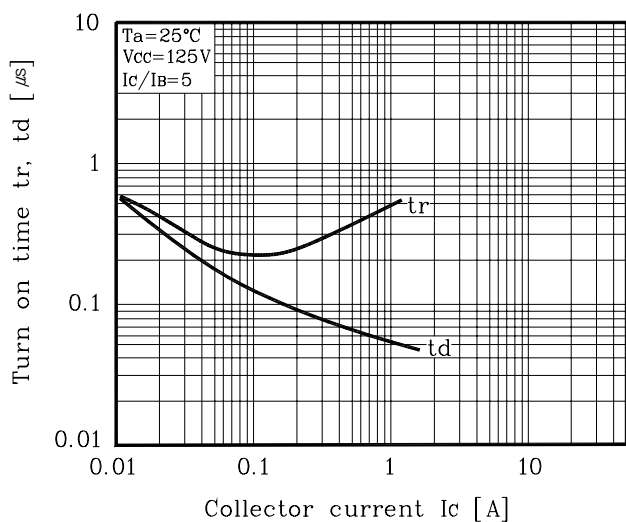


Fig. 6 Safe Operating Area

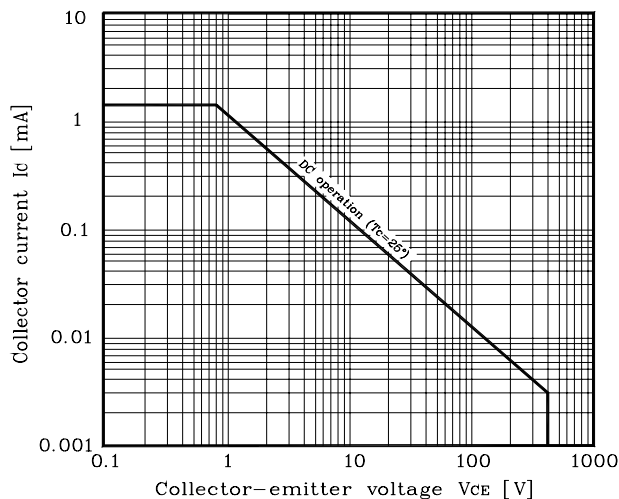

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.