

Descriptions

- Medium power amplifier

Features


- P_C (Collector power dissipation)=2W (Ceramic substate of 40×40×0.8 mm used)
- Low collector saturation voltage : $V_{CE(sat)}$ =0.5V(Typ.)
- Complementary pair with STB1188

Ordering Information

Type NO.	Marking	Package Code
STD1766	B2	SOT-89

Outline Dimensions

unit : mm

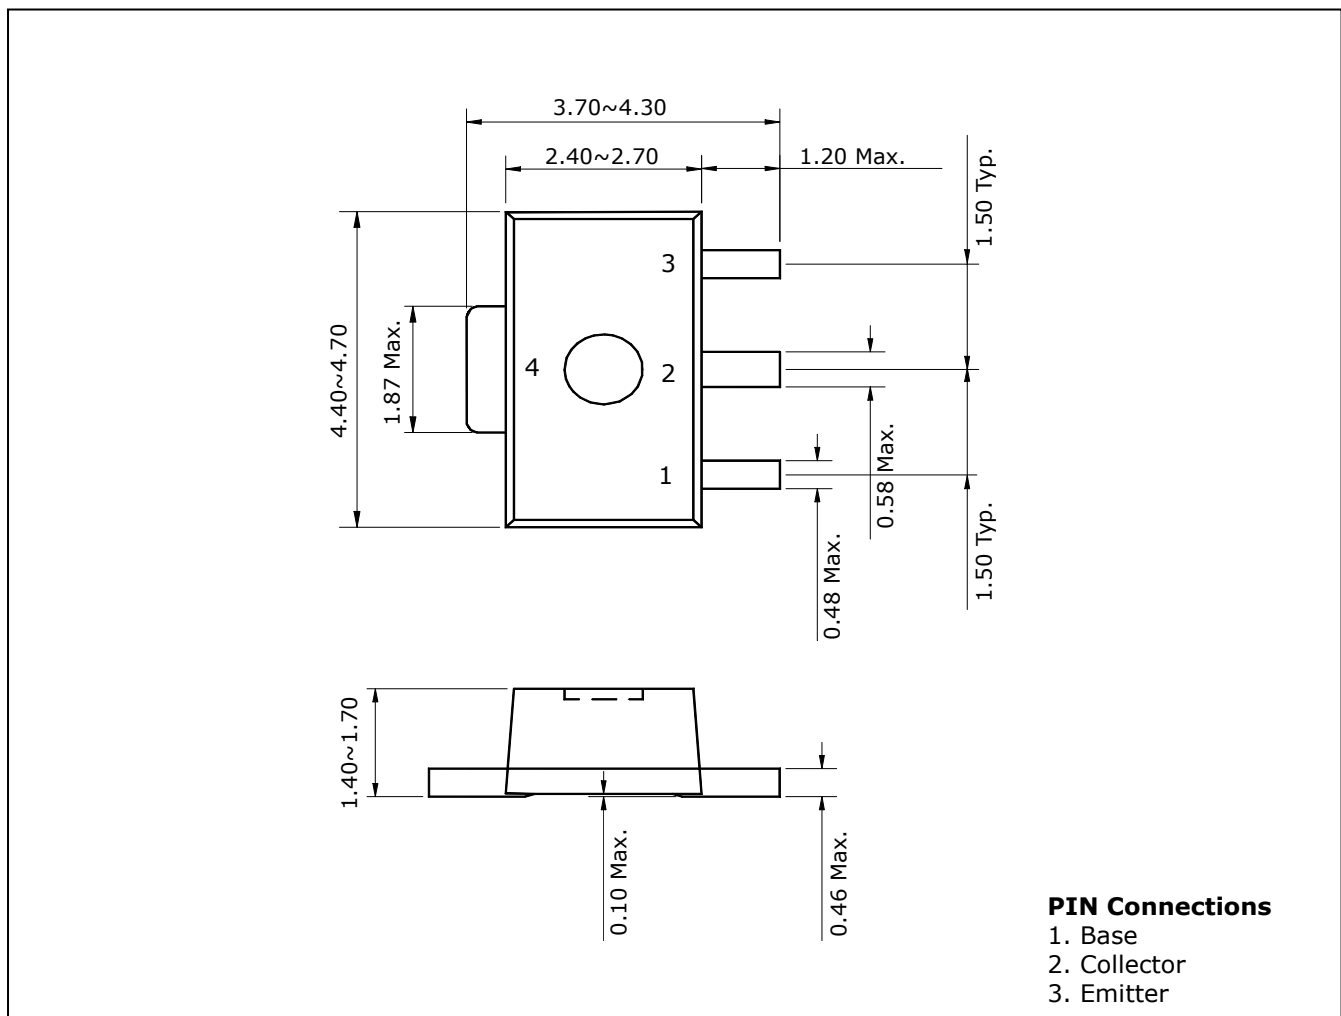

Absolute maximum ratings

(Ta=25°C)

Characteristic	Symbol	Ratings	Unit
Collector-Base voltage	V_{CBO}	40	V
Collector-Emitter voltage	V_{CEO}	32	V
Emitter-Base voltage	V_{EBO}	5	V
Collector current	I_C	2	A
Collector power dissipation	P_C	0.5	W
	P_C^*	2	
Junction temperature	T_J	150	°C
Storage temperature	T_{stg}	-55~150	°C

* : When mounted on 40×40×0.8 mm ceramic substrate

Electrical Characteristics

(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base breakdown voltage	BV_{CBO}	$I_C=50 \mu A, I_E=0$	40	-	-	V
Collector-Emitter breakdown voltage	BV_{CEO}	$I_C=1 mA, I_B=0$	32	-	-	V
Emitter-Base breakdown voltage	BV_{EBO}	$I_E=50 \mu A, I_C=0$	5	-	-	V
Collector cut-off current	I_{CBO}	$V_{CB}=20V, I_E=0$	-	-	1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=4V, I_C=0$	-	-	1	μA
DC current gain	h_{FE}^*	$V_{CE}=3V, I_C=0.5A$	100	-	320	-
Collector-Emitter saturation voltage	$V_{CE(sat)}$	$I_C=2A, I_B=200 mA$	-	0.5	0.8	V
Transition frequency	f_T	$V_{CB}=5V, I_C=500 mA$	-	100	-	MHz
Collector output capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1 MHz$	-	30	-	pF

* : h_{FE} rank / O : 100~200, Y : 160~320

Electrical Characteristic Curves

Fig. 1 $P_C - T_a$

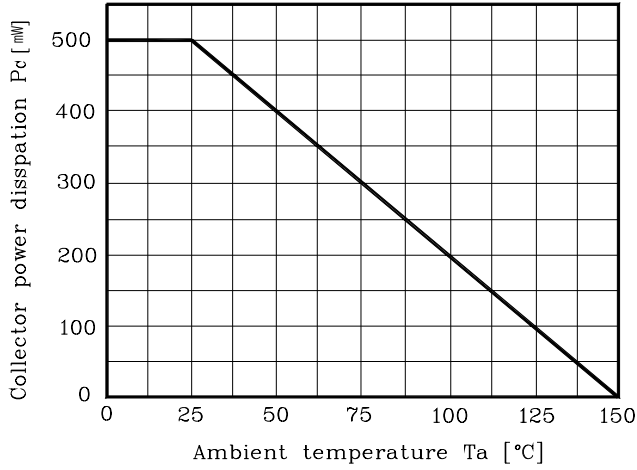


Fig. 2 $I_C - V_{BE}$

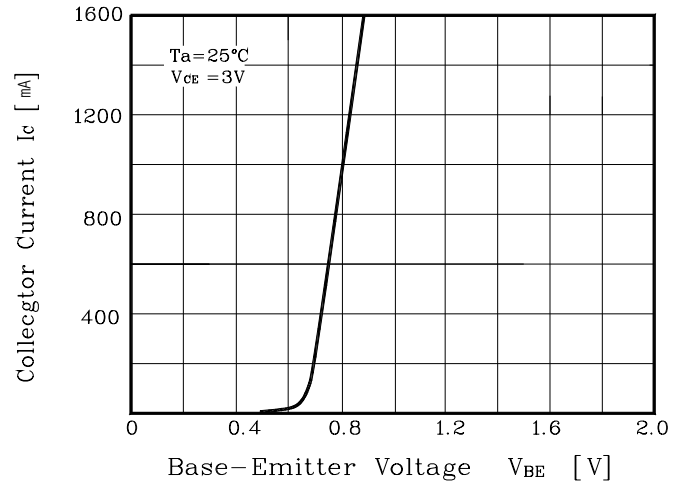


Fig. 3 $I_C - V_{CE}$

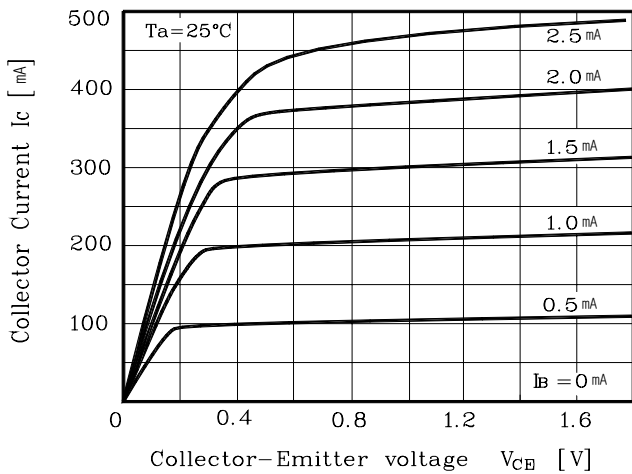


Fig. 4 $V_{CE(sat)} - I_C$


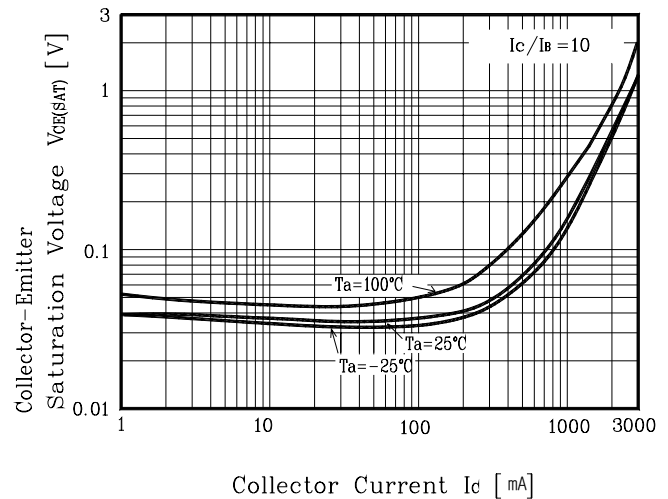


Fig. 5 $h_{FE} - I_C$

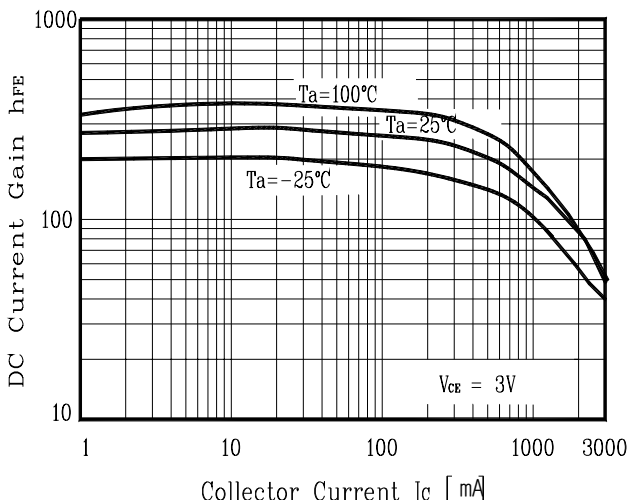

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.